

# StreetGlow®

## EL NEON PEDALS

# AUTOMATIC

### Contents (Automatic)

- 1- EL Transformer
- 1- EL Gas Pedal
- 1- EL Brake Pedal
- Installation hardware with instructions

### Step 1



Start with either pedal. Using Allen wrench, loosen all four allen screws on pedal pads.

### Step 2



Make sure to fasten "L" brackets over existing pedals and tighten all four allen screws.

### Step 3




Choose the best possible method for fastening pedal from above diagram. Always try to position "L" brackets inward towards center most point of pedal.

### Step 4



Check to make sure pedals are secure. "L" bracket should be firmly clamped to back of pedal.

### Step 5



After securing and fastening pedal make sure to check for any movement or loose "L" brackets. Pedal should appear level and flush with all allen screws tightly secured.

### Step 6



Before Driving! Apply pressure to pedal pads with foot to insure that all the screws are tightened properly. Repeat steps 1 to 6 for remaining pedals.

• Once you've completed with the mounting instructions, you may continue to wiring instructions.

### Instructions:

- Step 1: Connect Female parts of connector from pedals with Male parts of connector from transformer.
- Step 2: Connect Black(-)wire to Ground, and Black wire with White stripe(+) 12V to the Fused Power Source.\*
- Step 3: Tie any excess or loose wires together with black wire ties (Included) to avoid any possible disturbance while driving.
- Step 4: Mount Brightness Control Switch in a place where it is convenient and easy to reach.
- Step 5: Mount transformer beneath your dashboard and away from any moving parts.
- Step 6: Secure and fasten any power wires running from pedals to transformer with black electrical tape or wire ties.

**Warning! Do not put bare feet on EL Neon Pedal.**

\* This source depends on how you choose to turn pedals on. You can connect a toggle switch (Not Included) or tie them into your parking or headlight circuit. Professional installation is recommended for this type of installation.

The retailer shall not be held responsible for any damages that may occur as a result of defective products. OPTX products are recommended for show and off-road use only.

All OPTX by StreetGlow products are covered by a comprehensive warranty.


OPTX by StreetGlow products are warranted against defective materials and workmanship for one year from date of purchase. Any product that should fail for either defective materials or workmanship will be repaired or replaced, at OPTX's option, as the sole remedy of the buyer. Proof of purchase is required. All warranty claims are to be handled by selling agents. Accident, abuse, neglect, modifications, broken glass, labor, transportation, improper installation and the use of products other than for their intended purposes are not covered. NEITHER SELLER NOR THE MANUFACTURER SHALL BE LIABLE FOR ANY INJURY, LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL (INCLUDING, BUT NOT LIMITED TO INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR LOST PROFITS, LOST SALES, INJURY TO PERSON OR PROPERTY OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL LOSS), ARISING OUT OF THE USE OR THE INABILITY TO USE THE PRODUCT AND THE USER AGREES THAT NO OTHER REMEDY SHALL BE AVAILABLE TO IT. Before using, the user shall determine the suitability of the product for the intended use, and user assumes all risk and liability whatsoever in connection therewith. Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state and from country to country. DISCLAIMER: THE FOREGOING WARRANTY IS AN EXCLUSIVE WARRANTY IN LIEU OF ANY OTHER EXPRESS WARRANTIES. ANY IMPLIED WARRANTIES (INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), TO THE EXTENT THAT IT COULD APPLY TO ANY OF THE PRODUCTS MANUFACTURED BY THE COMPANY SHALL BE LIMITED IN DURATION TO THE PERIODS OF THE EXPRESS WARRANTY GIVEN ABOVE.

### WIRING INSTRUCTIONS (Automatic)

#### NOTE:

Make sure to add a 12V fuse to positive (+) wire before completing installation.

Warning: Do not install pads while vehicle is running or while parked on a hill. Before installation, remove ignition key, make sure vehicle is in parked position & apply parking brakes.

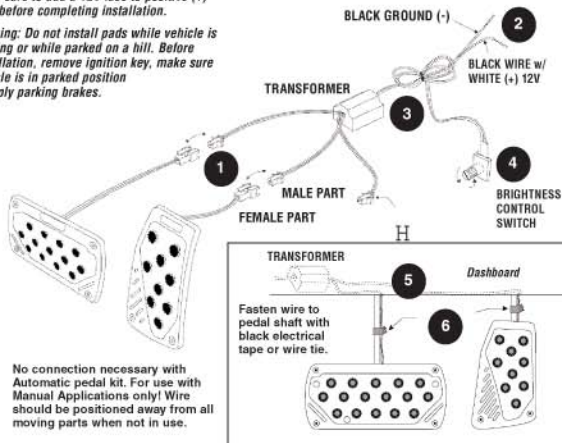

Design and specification are subject to change without notice.